



CELENIT AB/A2

Technical data sheet



Thermal and acoustic insulation board, in Euroclass A2-s1, d0, consisting of mineralized thin fir wood wool bound with white Portland cement and mineral powder. Wood wool is 2 mm wide. High quality boards for design acoustic absorption systems. It complies with EN 13168 and EN 13964 standards. The boards are certified by ANAB-ICEA for eco-compatibility of materials and manufacturing process. CELENIT AB/A2 is PEFC™ certified. Also available with FSC® certification.

Also available with grey Portland cement [CELENIT A/A2].

Edges detail

D - S4 - RD
DT - T - RDT - RST - PS - PM

Colours

natural or painted

Applications

false ceilings, wall coverings, baffles and acoustic rafts, design solutions

Technical data

Standard	EN 13168 - EN 13964				
Designation code	WW-EN13168-L3-W2-T2-S2-CS(10)300-CI3				
Length x Width [mm]	2400x600 - 2000x600 - 1200x600 - 600x600				
Thickness [mm]	15	25	35	50	
Weight [kg/m²]	9.4	15.3	21.7	28.0	
Declared thermal conductivity λ_D [W/mK]	0.100				
Declared thermal resistance R_D [m²K/W]	0.15	0.25	0.35	0.50	
Compressive stress at 10% deformation σ_{10} [kPa]	≥ 300				Sound absorption α_w up to 1.00 - NRC up to 0.95
Water vapour transmission μ	5				Durability Class C
Specific heat c_p [kJ/kgK] ¹	1.81				Light reflection CELENIT AB/A2 [%] 50.7 - 74.0 (painted white 05/15)
Reaction to fire ²	Euroclass A2-s1, d0				Light reflection CELENIT A/A2 [%] 31.2
Chloride content [%]	≤ 0.06				Release of formaldehyde Class E1
					Release of asbestos it does not contain asbestos

¹ Certified by the University of Bologna - LEBSC no. 809 | rev. 07.05.2009

² The reaction to fire does not change for painted products

¹ Certified by the University of Bologna - LEBSC no. 809 | rev. 07.05.2009

² The reaction to fire does not change for painted products

Logistic data

Dimensions [mm]	Pallet	15 mm	25 mm	35 mm	50 mm
boards: 2400x600	boards per pallet	130	88	60	44
pallet: 2400x1200	m² per pallet	187.20	126.72	86.40	63.36
boards: 2000x600	boards per pallet	130	88	60	44
pallet: 2000x1200	m² per pallet	156.00	105.60	72.00	52.80
boards: 1200x600	boards per pallet	130	88	60	44
pallet: 1200x1200	m² per pallet	93.60	63.36	43.20	31.68
boards: 600x600	boards per pallet	260	176	120	
pallet: 1200x1200	m² per pallet	93.60	63.36	43.20	

Certifications

ISO 9001:2015 no. 1351
ANAB no. EDIL 2009_004
EPD® S-P-02275
FSC® no. ICILA-COC-002789
PEFC™ no. ICILA-PEFCCOC-000117
ICEA no. LEED 2015_001
ICEA no. REC 2015_001





Sound absorption

Type of board ¹	Test specifications ²			Certificate ³		Sound absorption									
	Thickness [mm]	MW [mm]	TH [mm]	No.	Date	Frequencies α_p [Hz]						α_w	NRC	SAA	Class
						125	250	500	1000	2000	4000				
Application in adherence															
CELENIT AB/A2	25		25	331333-A	11.02.2016	0.10	0.20	0.40	0.80	0.80	0.85	0.45 (M-H)	0.55	0.55	D
Empty air gap															
CELENIT AB/A2	25		65	331333-B	11.02.2016	0.15	0.30	0.70	0.70	0.65	0.95	0.60 (H)	0.60	0.58	C
Background filling with rock wool															
CELENIT AB/A2	25	40 (2)	65	324220-B	30.04.2015	0.25	0.60	1.00	1.00	0.80	0.85	0.85	0.90	0.88	B
CELENIT AB/A2	25	60 (2)	125	324222-A	30.04.2015	0.35	0.90	1.00	1.00	0.85	0.85	0.95	0.95	0.94	A
CELENIT AB/A2	25	40 (3)	300	324222-B	30.04.2015	0.50	0.90	1.00	1.00	0.90	0.90	1.00	0.95	0.93	A

¹ Paint doesn't affect sound absorption performances of CELENIT boards as described in the technical note provided by Istituto Giordano dated 16.07.2015. Sound absorption values are also valid for products with grey cement


² Test specifications: "thickness" is relative to CELENIT board - "MW" is the thickness of rock wool in the background, (2) density 50 kg/m³; (3) density 70 kg/m³ - "TH" is the total construction height from the lower edge of ceiling to lower edge of boards

³ All certificate are based on tests carried out at Giordano Institute (Bellaria - RN - Italy) according to EN ISO 354:2003 standard


Application in adherence



Empty air gap

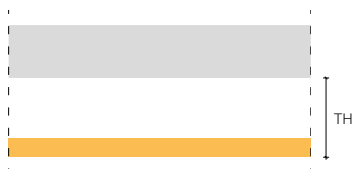

Background filling with rock wool

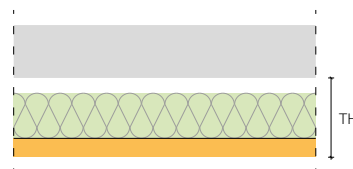

Storage, use and maintenance

The boards must be stored on a pallet placed on a flat surface, protected from rain and direct sunlight. Pallets must be handled with care on site. Bumping the corners of the pallets can cause damage to the boards. For more information see the "Storage, use and maintenance" information available in the download area of the website www.celenit.com.



CELENIT boards are dimensionally stable (EN 13168), however, they must be installed after acclimating to the same room they are going to be installed in, as well as after all concrete works are finished and the doors, windows, heating and ventilation systems have been installed. Room temperature must be kept constant before and after installation. Do not suddenly change the temperature of the room after installation.

The boards have one side that should be visible (front of the board) and another side that should be placed against the structure (back of the board).

The back of the board usually has the CELENIT logo or shows calibration marks. The front may be painted and/or has worked edges.

In the absence of paint or edges, the front can be identified according to the pallet layout: the front of the boards faces the top and the back faces the pallet.

Due to their natural production process and raw materials, boards that are not painted may have an uneven color.

The boards must be painted to have an even color.